


BAC 50

NEW WAVE OF COLD



Features	BAC 50
Outer dimensions in mm	610 W x 410 D x 485 H
Inner dimensions in mm	480 W x 280 D x 330 H
Volume	44 litres
K value	0,46 W/m ² .K
Weight	17 Kg
Insulation material	Expanded polyurethane foam
Material of the walls	Fibreglass/polyester

Specifications and optional equipment

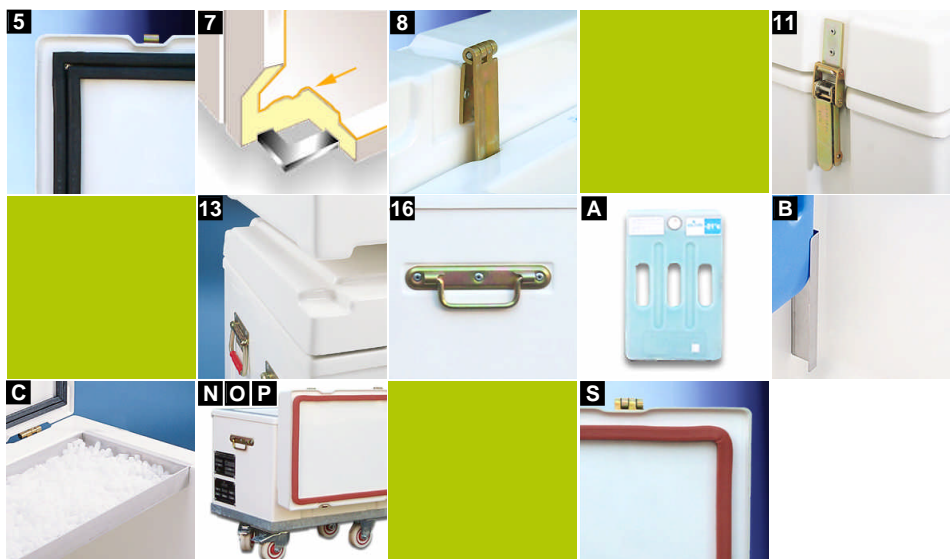

Technical features

- 5 One-piece EPDM seal.
- 7 Body and lid are moulded in Fibreglass/polyester and coated with white gelcoat. Insulation with CFC free expanded polyurethane foam.
- 8 Lid fitted with 2 hinges can be pushed fully backwards.
- 11 Flush mounted and recessed fastener
- 13 Stackable Bac 50 with embossed bottom and lid from moulding.
- 16 2 flush-mounted handles

Optional equipment

- A Eutectic plate TOP 55
- B Eutectic plate support stainless steel
- C Dry ice drawer
- N Castor base fitted with 2 fixed and 2 swivelling wheels ø 100 mm
- O Castor base fitted with 2 fixed and 2 swivelling wheels ø 100 mm with brake
- P Castor base fitted with 4 swivelling wheels ø 100 mm, 2 with brake.
- S Silicone seal

Tel : + 33 (0)4 77 906 863
 Fax : + 33 (0)4 77 903 495
www.olivo.fr



LEADER IN INSULATED CONTAINERS